

1.

Belt Series

S.006


Pitch 6,25 mm

S.06-401

Transport of products that require a very small transfer, runs on 7 mm nose bar.
FDA approved



SCANBELT
...keeping industry moving...

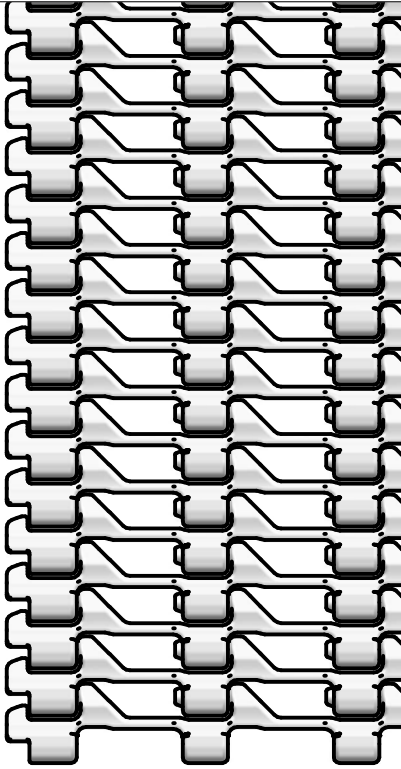

PROTECTED BY THE EU DESIGN REGISTRATION

SUGGESTED INDUSTRIES



STANDARD FEATURES


Belt surface	Open belt with a smooth surface
Open area	40 %. Biggest opening 4 x 8 mm.
Strength	Ideal choice for light transportation
Cleanability	Excellent. FSIS
Standard width	Increments of 40 mm, e.g. 200 mm, 240 mm

BELT DATA

Belt materials	Temperature range		Max. belt pull kg/m of width	Belt weight kg/m ²	Standard Colours
	Min.	Max.			
POM	- 43	95	250	2,8	Natural

ACCESSORIES

Type	mm
Flights	-
Scoop Flights	-
Bent Flights	-
Supported Flights	-
Flights fitted with a Round Top	-
Side Guards	-
Friction Top	-
Hold-downs	-

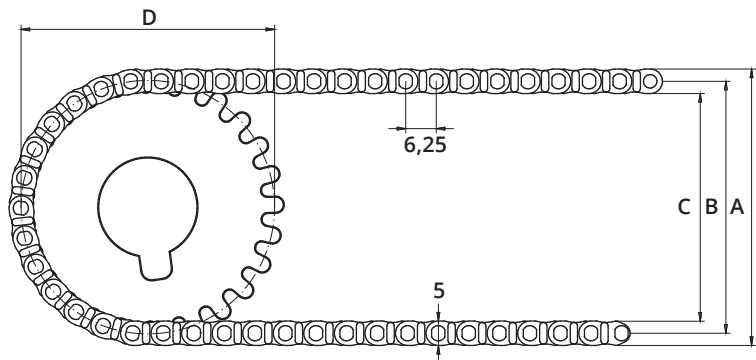

SPROCKET DATA

A = Outside, B = Pitch, C = Inside, D = Pitch Circle Diameter

No. Teeth	A	B	C	D	Hub Width	Round Bore		Square Bore	
	mm	mm	mm	mm		mm	Inch	mm	Inch
20	45	40	35	45	6	20			
36	75	70	65	77	6	20 / 25	1	25	
48	97	92	87	101	6	20 / 25	1 / 1/4	25 / 40	1/2

*Other sprockets are available upon request.