


RULLI CONICI CON PULEGGIA POLY V

SERIE 2650

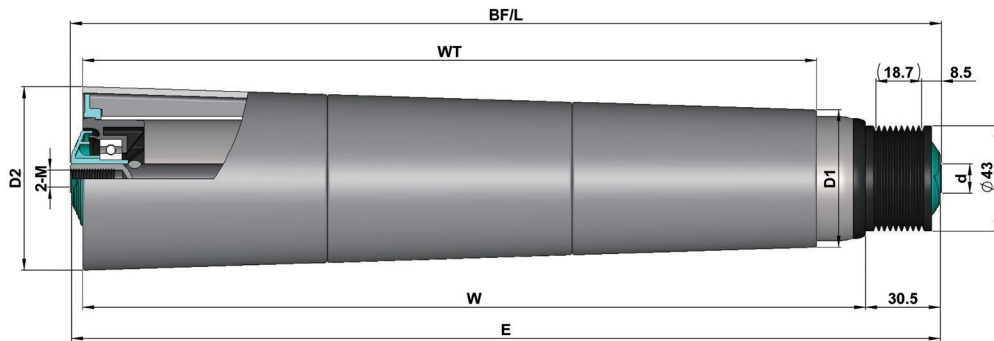


D	t	asse	Lung cono	D1	D2
Ø50	1.5	11hex, Ø12/15	300	Ø52.5	Ø71.2
			350	Ø55.6	Ø77.6
			400	Ø52.5	Ø77.6
			450	Ø55.6	Ø84.0
			500	Ø52.5	Ø84.0
			550	Ø55.6	Ø90.4
			600	Ø52.5	Ø90.4
			650	Ø55.6	Ø96.8
			700	Ø52.5	Ø96.8
			750	Ø55.6	Ø103.2
			800	Ø52.5	Ø103.2
			850	Ø55.6	Ø109.6

Nota bene: sono disponibili i tubi in Acciaio Z/P e Inox.

RULLI CONICI CON PULEGGIA CINGHIA TONDA


SERIE 2660

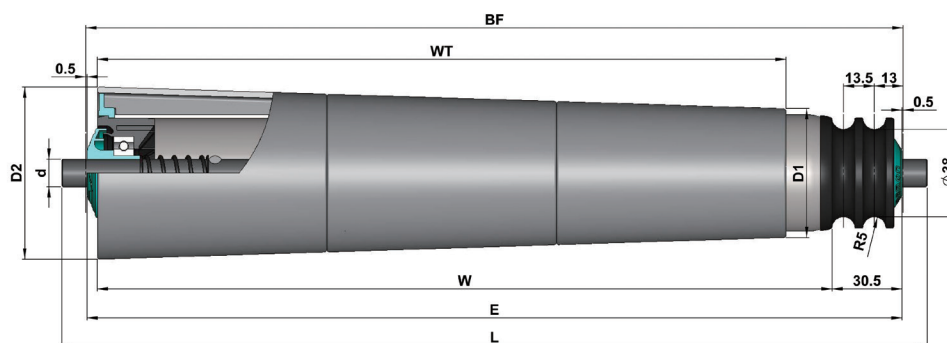

D	t	Asse	Lung cono	D1	D2
Ø50	1.5	11hex, Ø12/15	300	Ø52.5	71.2
			350	Ø55.6	Ø77.6
			400	Ø52.5	Ø77.6
			450	C55.6	Ø84.0
			500	Ø56	Ø84.0
			550	Ø55.6	Ø90.4
			600	Ø52.5	Ø90.4
			650	Ø55.6	Ø96.8
			700	Ø52.5	Ø96.8
			750	Ø55.6	Ø103.2
			800	Ø52.5	Ø103.2
			850	Ø55.6	Ø109.6

RULLI CONICI CON PIGNONE IN POLIAMMIDE

SERIE 2624

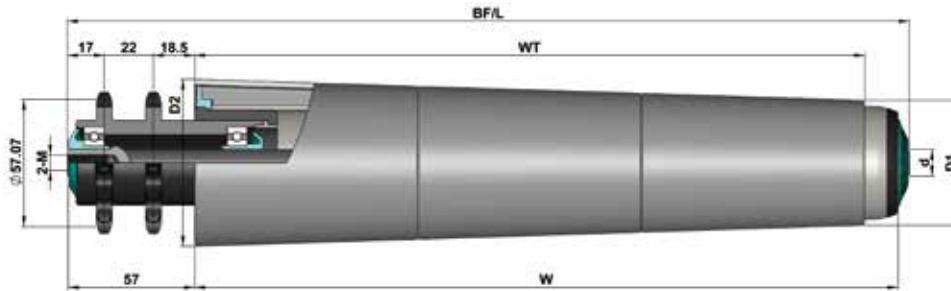


Tube Dia.(D)	Shaft Dia.(d)			Sprocket type
Φ50	Φ12/15	BF=W+63	L=W+63	08B14T

Tube	D*T	WT	D1	D2	Shaft Dia.(d)	
					Φ12 (M8x15)	Φ15 (M10x20)
Steel, zinc plated, tapered sleeve	Φ50x1.5	300	Φ56	Φ74.9	2.624.HHJ.ACC	2.624.HHJ.ADC
		350	Φ52.9	Φ74.9		
		400	Φ56	Φ81.1		
		450	Φ52.9	Φ81.1		
		500	Φ56	Φ87.4		
		550	Φ52.9	Φ87.4		
		600	Φ56	Φ93.7		
		650	Φ52.9	Φ93.7		
		700	Φ56	Φ100		
		750	Φ52.9	Φ100		
		800	Φ56	Φ106.3		
		850	Φ52.9	Φ106.3		

RULLI CONICI CON PIGNONE IN ACCIAIO

SERIE 2521

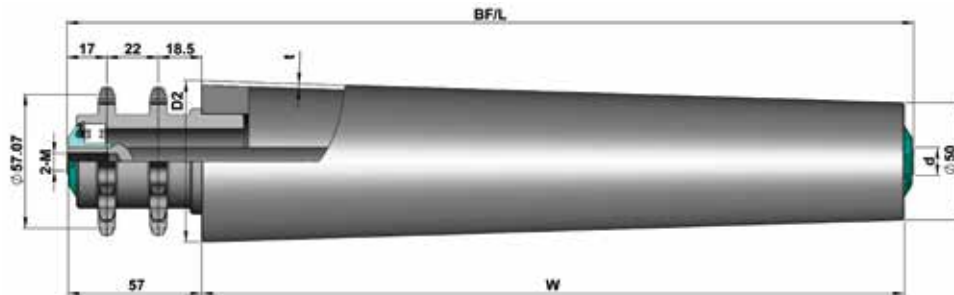


Tube Dia.(D)	Shaft Dia.(d)			Sprocket type
Φ50	Φ12/15	BF=W+62	L=W+62	08B14T

Tube	D*T	Shaft Dia.(d)	
		Φ12 (M8x15)	Φ15 (M10x20)
Steel, zinc plated	Φ50x2.0	2.521.JWB.ACC	2.521.JWB.ADC

RULLI CONICI A GRAVITÀ

SERIE 1600

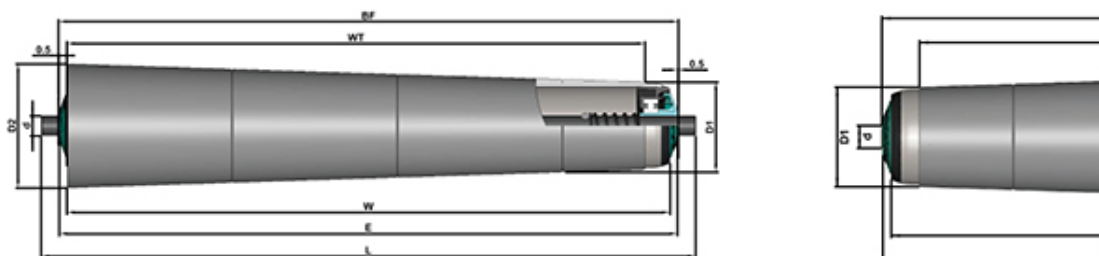


Spring loaded

Internal Thread

D	T	Asse	WT	D1	D2
Ø50	1.5	11hexØ12/15	300	Ø56	Ø74.9
			350	Ø52.9	Ø74.9
			400	Ø56	Ø81.1
			450	Ø52.9	Ø81.1
			500	Ø56	Ø87.4
			550	Ø52.9	Ø87.4
			600	Ø56	Ø93.7
			650	Ø52.9	Ø93.7
			700	Ø56	Ø100
			750	Ø52.9	Ø100
			800	Ø56	Ø106.3
850	Ø52.9	Ø106.3			

SERIE 1500

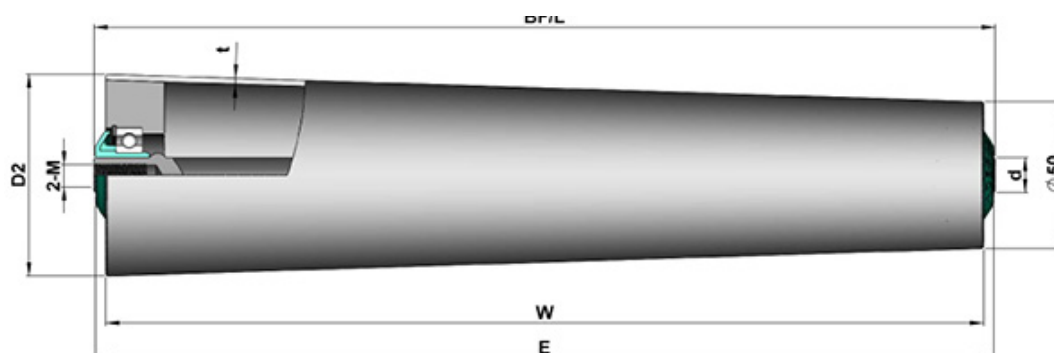

D*t	Asse	Lunghezze	Tubo
Ø50x2	Ø12/15	A richiesta	Acciaio Z/P; SS