

# TRAPEZOIDAL PROFILES





# TRAPEZOIDAL PROFILES

L x h in mm

			6 x 4 (Y)	8 x 5 (M)	10 x 6 (Z)	13 x 8 (A)	17 x 11 (B)	22 x 14 (C)	32 x 19 (D)	13 x 15 (A)	17 x 20 (B)	22 x 25 (C)
Reinforced	<b>DEL/SAN</b> Reinforced Aramid	95 ShA										
	<b>H15 / H16</b> Reinforced Aramid	92 ShA										
	<b>SOUPLEX</b>	85 ShA										
	<b>POLYBELT+</b>	85-70 ShA 95-70 ShA										
Standard	<b>DEL/ROC</b>	100 ShA 55 ShD										
	<b>DEL/ROC</b>	100 ShA 55 ShD										
	<b>DEL/FLEX</b>	90 ShA										
	<b>DEL/FLEX</b>	90 ShA										
	<b>SOUPLEX</b>	85 ShA										
	<b>SOUPLEX</b>	80 ShA										
	<b>SUPERFLEX</b>	70 ShA										
Standard	<b>DEL/FLEX</b>	90 ShA										
	<b>SOUPLEX</b>	85 ShA										
A crest TOPGRIP	<b>DEL/SAN</b> Reinforced Aramid	95 ShA										
	<b>H15 / H16</b> Reinforced Aramid	92 ShA										
	<b>SOUPLEX</b> Reinforced Aramid	85 ShA										
	<b>DEL/FLEX</b>	90 ShA										
	<b>SOUPLEX</b>	85 ShA										




**COGGING (Notching):** All trapezoidal profiles can be 'cogged' (notched) from a 10x6mm section upwards. The cogging allows the belt to negotiate smaller pulleys.



**COATINGS:** Coatings are available from a 10x6mm section upwards. A wide range of smooth or structured coatings, in PU, PVC, felt or rubber is available. See page 33.




# REINFORCED TRAPEZOIDAL PROFILES



**DEL/SAN**  
blue reinforced Aramid



Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
DSVBAR13	35	150	130	13x8 (A)	1%	DSVBAC13	35	120	100
DSVBAR17	60	180	160	17x11 (B)	1.5%	DSVBAC17	60	150	130
DSVBAR22	95	260	240	22x14 (C)	1.5%	DSVBAC22	95	210	180



**DEL/SAN**  
Supergrip PVC coated




Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
DSVBAR13NA	35	150	130	13x8 (A)	1%	DSVBAC13NA	35	120	100
DSVBAR17NA	60	180	160	17x11 (B)	1.5%	DSVBAC17NA	60	150	130
DSVBAR22NA	95	260	240	22x14 (C)	1.5%	DSVBAC22NA	95	210	180

Food	CE - FDA*	Coefficient of friction	HDPE: 0.2	Temperature extremes	-20°C / +70°C
Hardness	95 ShA		Steel: 0.4		
Pretension	See table		Stainless steel: 0.5		
				Packaging	30m


\*Except Supergrip coatings (NA) and green SOUPLEX.




# REINFORCED TRAPEZOIDAL PROFILES



**DEL/SAN**  
Souplex 85 ShA  
nubtop coated



Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
DSVBAR13SPI	35	170	150	13x8 (A)	1%	DSVBAC13SPI	35	140	120
DSVBAR17SPI	60	200	180	17x11 (B)	1.5%	DSVBAC17SPI	60	170	150
DSVBAR22SPI	95	280	260	22x14 (C)	1.5%	DSVBAC22SPI	95	230	200



**DEL/SAN**  
Totalgrip 70 ShA  
nubtop coated




Reference	Traction strength (daN)	pulley Ø mm		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
DSVBAR13TPI	35	160	140	13x8 (A)	1%	DSVBAC13TPI	35	130	110
DSVBAR17TPI	60	190	170	17x11 (B)	1.5%	DSVBAC17TPI	60	160	140
DSVBAR22TPI	95	270	250	22x14 (C)	1.5%	DSVBAC22TPI	95	220	190

Food	CE - FDA*	Coefficient of friction	HDPE: 0.2	Temperature extremes	-20°C / +70°C
Hardness	95 ShA		Steel: 0.4		
Pretension	See table		Stainless steel: 0.5		

\*Except Supergrip coatings (NA) and green SOUPLEX.

# REINFORCED TRAPEZOIDAL PROFILES



## H15 / H16 green reinforced Aramid



H15  
Plain

H16 Cogged

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
H15GAR10	15	110	90	10x6 (Z)	1%	H16GAC10	15	80	65
H15GAR13	30	140	110	13x8 (A)	1%	H16GAC13	30	100	70
H15GAR17	50	170	140	17x11 (B)	1.5%	H16GAC17	50	130	110
H15GAR22	75	250	230	22x14 (C)	1.5%	H16GAC22	75	180	150
H15GAR32	140	350	300	32x19 (D)	1.5%	H16GAC32	140	300	250



## H15 / H16 Supergrip PVC coated



H15  
Plain

H16 Cogged

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
H15GAR10NA	15	110	90	10x6 (Z)	1%	H16GAC10NA	15	80	65
H15GAR13NA	30	140	110	13x8 (A)	1%	H16GAC13NA	30	100	70
H15GAR17NA	50	170	140	17x11 (B)	1.5%	H16GAC17NA	50	130	110
H15GAR22NA	75	250	230	22x14 (C)	1.5%	H16GAC22NA	75	180	150
H15GAR32NA	140	350	300	32x19 (D)	1.5%	H16GAC32NA	140	300	250

Food	CE - FDA*	Coefficient of friction	HDPE: 0.25	Temperature extremes	-20°C / +70°C
Hardness	92 ShA		Steel: 0.45		
Pretension	See table		Stainless steel: 0.55	Packaging	30m

\*Except Supergrip coatings (NA) and green SOUPLEX.



# REINFORCED TRAPEZOIDAL PROFILES



H15  
Plain

H15 / H16  
Souplex 85 ShA  
nubtop coated



H16 Cogged

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
H15GAR10SPI	15	130	110	10x6 (Z)	1%	H16GAC10SPI	15	100	80
H15GAR13SPI	30	160	130	13x8 (A)	1%	H16GAC13SPI	30	120	100
H15GAR17SPI	50	190	170	17x11 (B)	1.5%	H16GAC17SPI	50	150	130
H15GAR22SPI	75	270	250	22x14 (C)	1.5%	H16GAC22SPI	75	200	170
H15GAR32SPI	140	370	320	32x19 (D)	1.5%	H16GAC32SPI	140	320	270



H15  
Plain

H15 / H16  
Totalgrip 70 ShA  
nubtop coated



H16 Cogged

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
H15GAR10TPI	15	120	100	10x6 (Z)	1%	H16GAC10TPI	15	90	75
H15GAR13TPI	30	150	120	13x8 (A)	1%	H16GAC13TPI	30	110	80
H15GAR17TPI	50	180	160	17x11 (B)	1.5%	H16GAC17TPI	50	140	120
H15GAR22TPI	75	260	240	22x14 (C)	1.5%	H16GAC22TPI	75	190	160
H15GAR32TPI	140	360	310	32x19 (D)	1.5%	H16GAC32TPI	140	310	260

Food Hardness	CE - FDA*	Coefficient of friction	HDPE: 0.25	Temperature extremes	-20°C / +70°C
Pretension	92 ShA		Steel: 0.45		
	See table		Stainless steel: 0.55		

\*Except Supergrip coatings (NA) and green SOUPLEX.



# REINFORCED TRAPEZOIDAL PROFILES



## SOUPLEX white reinforced Aramid




Plain

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension
		Advised	Minimum		
SXVWAR10	10	90	75	10x6 (Z)	0.5%
SXVWAR13	25	100	80	13x8 (A)	0.5%
SXVWAR17	40	150	130	17x11 (B)	1%
SXVWAR22	60	220	200	22x14 (C)	1.5%
SXVWAR32	120	280	250	32x19 (D)	1.5%

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
SXWAC10	10	60	50
SXWAC13	25	80	60
SXWAC17	40	110	90
SXWAC22	60	160	130
SXWAC32	120	220	180



## SOUPLEX reinforced Supergrip PVC coated



Plain

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension
		Advised	Minimum		
SXVWAR10NA	10	90	75	10x6 (Z)	0.5%
SXVWAR13NA	25	100	80	13x8 (A)	0.5%
SXVWAR17NA	40	150	130	17x11 (B)	1%
SXVWAR22NA	60	220	200	22x14 (C)	1.5%
SXVWAR32NA	120	280	250	32x19 (D)	1.5%

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
SXWAC10NA	10	60	50
SXWAC13NA	25	80	60
SXWAC17NA	40	110	90
SXWAC22NA	60	160	130
SXWAC32NA	120	220	180

Food Hardness	CE - FDA* 85 ShA	Coefficient of friction	HDPE: 0.35	Temperature extremes	-20°C / +70°C
Pretension	See table		Steel: 0.6		
			Stainless steel: 0.7	Packaging	30m

\* Except Supergrip coatings (NA) and green SOUPLEX.



# REINFORCED TRAPEZOIDAL PROFILES



**SOUPLEX**  
Souplex 85 ShA  
nubtop coated



Plain

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
-	-	-	-
SXWAR13SPI	25	120	100
SXWAR17SPI	40	170	150
SXWAR22SPI	60	240	210
SXWAR32SPI	120	330	280

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
-	-	-	-
SXWAC10SPI	10	90	75
SXWAC13SPI	25	100	80
SXWAC17SPI	40	130	110
SXWAC22SPI	60	180	150
SXWAC32SPI	120	240	200



**SOUPLEX**  
Totalgrip 70 ShA  
nubtop coated



Plain

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
-	-	-	-
SXWAR13TPI	25	110	90
SXWAR17TPI	40	160	140
SXWAR22TPI	60	230	200
SXWAR32TPI	120	300	250

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
-	-	-	-
SXWAC10TPI	10	80	70
SXWAC13TPI	25	90	75
SXWAC17TPI	40	120	100
SXWAC22TPI	60	170	140
SXWAC32TPI	120	230	190

Food	CE - FDA*	Coefficient of friction	HDPE: 0.35	Temperature extremes	-20°C / +60°C
Hardness	85 ShA		Steel: 0.6		
Pretension	See table		Stainless steel: 0.7		
				Packaging	30m

\* Except Supergrip coatings (INA) and green SOUPLEX.



The recommended and minimum diameters are given for end-to-end joints. The life of the belt is reduced on minimum diameters depending on the operating conditions (load, accumulation, stop/start operation, tension etc.). In the case of overlap joints, use the recommended diameters for an optimal lifespan.



# POLYBELT+



PV17PCK7085

## POLYBELT+ blue reinforced Aramid



PV17PCK7095

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension
		Advised	Backflex		
PV17PCK7085	65	120	140	17x11 (B)	1%
	112	120	140	17x11 (B)	1.5%

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Backflex
PV17PCK7095	68	150	170
	124	150	170


Food	CE - FDA	Temperature extremes	-20°C / +70°C
Hardness of belt	85 ShA		
Hardness of coating	70 ShA	Coil length	50m
Pretension	1 to 1.5%		
Friction coefficient	HDPE: 0.35	Steel: 0.6	Stainless steel: 0.7

Food	CE - FDA	Temperature extremes	-20°C / +70°C
Hardness of belt	95 ShA		
Hardness of coating	70 ShA	Coil length	50m
Pretension	1 to 1.5%		
Friction coefficient	HDPE: 0.2	Steel: 0.4	Stainless steel: 0.5

### Overlap joint (see page 43)

### APPLICATIONS

- Roller driving
  - Conveyance of heavy loads
- 1 High grip cover in PU 70 ShA
  - 3 cords of Aramid reinforcement
  - 1 trapezoidal base profile in cogged 85 or 95 ShA PU

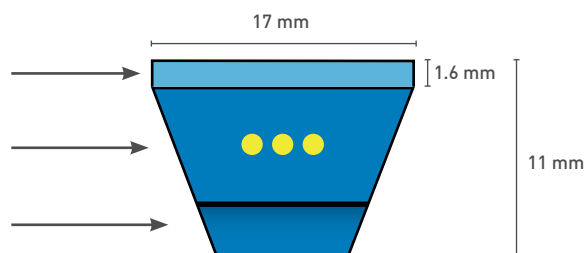

In the case of tangential roller drives in a greasy and/or moist environment, we recommend replacing the top cover with our PU 70 ShA Totalgrip SG3 coating.




Other coating possibilities, on the upper side.

- TOTALGRIP smooth
- TOTALGRIP nubtop



# TRAPEZOIDAL PROFILES



## DEL/ROC black



Plain

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
DRVN10	22	120	100	10x6 (Z)	2%	DRVNCR10	15	100	80
DRVN13	40	160	140	13x8 (A)	2%	DRVNCR13	28	120	100
DRVN17	74	220	200	17x11 (B)	2%	DRVNCR17	51	160	140
DRVN22	122	280	250	22x14 (C)	2%	DRVNCR22	85	240	190




## DEL/ROC white



Plain

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
DRWW10	22	120	100	10x6 (Z)	2%	DRWWCR10	15	100	80
DRWW13	40	160	140	13x8 (A)	2%	DRWWCR13	28	120	100
DRWW17	74	220	200	17x11 (B)	2%	DRWWCR17	51	160	140
DRWW22	122	280	250	22x14 (C)	2%	DRWWCR22	85	240	190



## DEL/ROC Supergrip PVC coated



Plain

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
DRVN10NA	22	120	100	10x6 (Z)	2%	DRVNCR10NA	15	100	80
DRVN13NA	40	160	140	13x8 (A)	2%	DRVNCR13NA	28	120	100
DRVN17NA	74	220	200	17x11 (B)	2%	DRVNCR17NA	51	160	140
DRVN22NA	122	280	250	22x14 (C)	2%	DRVNCR22NA	85	240	190

Food	CE - FDA*	Coefficient of friction	HDPE: 0.15 - 0.2	Temperature extremes	-30°C / +90°C
Hardness	100 ShA - 55 ShD		Steel: 0.35 - 0.4		
Pretension	0.5 - 2%		Stainless steel: 0.5		
				Packaging	30 m

\*Except Supergrip coated (NA).

# TRAPEZOIDAL PROFILES



## DEL/FLEX red



Plain

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
DFVR08	7	55	50
DFVR10	11	80	65
DFVR13	20	100	80
DFVR17	36	150	130
DFVR22	60	220	180
DFVR32	118	300	250

Cogged

Reference	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
				Advised	Minimum
8x5 (M)	5%	-	-	-	-
10x6 (Z)	5%	DFVRCR10	7	60	50
13x8 (A)	5%	DFVRCR13	14	80	60
17x11 (B)	5%	DFVRCR17	25	110	90
22x14 (C)	5%	DFVRCR22	42	150	120
32x19 (D)	5%	DFVRCR32	82	220	180



## DEL/FLEX blue




Plain

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
DFVB06	4.5	45	40
DFVB08	7	55	50
DFVB10	11	80	65
DFVB13	20	100	80
DFVB17	36	150	130

Cogged

Reference	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
				Advised	Minimum
6x4 (Y)	5%	-	-	-	-
8x5 (M)	5%	-	-	-	-
10x6 (Z)	5%	DFVBCR10	7	60	50
13x8 (A)	5%	DFVBCR13	14	80	60
17x11 (B)	5%	DFVBCR17	25	110	90



## DEL/FLEX Supergrip PVC coated



Plain

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
DFVR10NA	11	80	65
DFVR13NA	20	100	80
DFVR17NA	36	150	130
DFVR22NA	60	220	180
DFVR32NA	118	300	250

Cogged


Reference	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
				Advised	Minimum
10x6 (Z)	5%	DFVRCR10NA	7	60	50
13x8 (A)	5%	DFVRCR13NA	14	80	60
17x11 (B)	5%	DFVRCR17NA	25	110	90
22x14 (C)	5%	DFVRCR22NA	42	150	120
32x19 (D)	5%	DFVRCR32NA	82	220	180

Food Hardness	CE - FDA* 90 ShA	Coefficient of friction	HDPE: 0.25 Steel: 0.5 Stainless steel: 0.6	Temperature extremes	-20°C / +70°C
Pretension	3 - 6%		Packaging	30 m	

\* Except Supergrip coatings (NA) and green SOUPLEX.



# TRAPEZOIDAL PROFILES



**DEL/FLEX**  
Souplex 85 ShA  
nubtop coated



Plain

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
DFVR10SPI	15	90	80	10x6 (Z)	5%	DFVRCR10SPI	11	80	70
DFVR13SPI	25	120	100	13x8 (A)	5%	DFVRCR13SPI	19	100	80
DFVR17SPI	43	170	150	17x11 (B)	5%	DFVRCR17SPI	32	130	110
DFVR22SPI	69	240	210	22x14 (C)	5%	DFVRCR22SPI	51	170	140
DFVR32SPI	132	340	260	32x19 (D)	5%	DFVRCR32SPI	96	240	200



**DEL/FLEX**  
Totalgrip 70 ShA nubtop  
coated



Plain

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension	Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum					Advised	Minimum
DFVR10TPI	11	85	75	10x6 (Z)	5%	DFVRCR10TPI	7	70	60
DFVR13TPI	20	110	90	13x8 (A)	5%	DFVRCR13TPI	14	90	75
DFVR17TPI	36	160	140	17x11 (B)	5%	DFVRCR17TPI	25	120	100
DFVR22TPI	60	230	200	22x14 (C)	5%	DFVRCR22TPI	42	160	130
DFVR32TPI	118	310	260	32x19 (D)	5%	DFVRCR32TPI	82	230	190

Food Hardness	CE - FDA*	Coefficient of friction	HDPE: 0.25	Temperature extremes	-20°C / +70°C
Pretension	90 ShA		Steel: 0.5		
	3 - 6%		Stainless steel: 0.6		

\* Except Supergrip coatings (NA) and green SOUPLEX.

# TRAPEZOIDAL PROFILES



## SOUPLEX brown



Plain


Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension
		Advised	Minimum		
SXVM08	4	50	40	8x5 (M)	8%
SXVM10	6	70	55	10x6 (Z)	8%
SXVM13	12	80	70	13x8 (A)	8%
SXVM17	22	130	110	17x11 (B)	8%
SXVM22	36	170	130	22x14 (C)	8%
SXVM32	71	250	220	32x19 (D)	8%

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
-	-	-	-
SXVMCR10	4	50	40
SXVMCR13	8	60	50
SXVMCR17	15	90	70
SXVMCR22	25	130	110
SXVMCR32	50	180	150



## SOUPLEX Supergrip PVC coated



Plain

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension
		Advised	Minimum		
SXVM08NA	4	50	40	8x5 (M)	8%
SXVM10NA	6	70	55	10x6 (Z)	8%
SXVM13NA	12	80	70	13x8 (A)	8%
SXVM17NA	22	130	110	17x11 (B)	8%
SXVM22NA	36	170	130	22x14 (C)	8%
SXVM32NA	71	250	220	32x19 (D)	8%

Cogged


Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
-	-	-	-
SXVMCR10NA	4	50	40
SXVMCR13NA	8	60	50
SXVMCR17NA	15	90	70
SXVMCR22NA	25	130	110
SXVMCR32NA	50	180	150

Food	CE - FDA*	Coefficient of friction	HDPE: 0.35	Temperature extremes	-20°C / +60°C
Hardness	85 ShA		Steel: 0.6		
Pretension	5 - 8%		Stainless steel: 0.7		
				Packaging	30 m

\*Except Supergrip coatings (NA) and green SOUPLEX.



# TRAPEZOIDAL PROFILES



## SOUPLEX Souplex 85 ShA nubtop coated



Plain

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension
		Advised	Minimum		
SXVM10SPI	10	80	70	10x6 (Z)	8%
SXVM13SPI	17	100	90	13x8 (A)	8%
SXVM17SPI	29	150	130	17x11 (B)	8%
SXVM22SPI	45	190	150	22x14 (C)	8%
SXVM32SPI	85	280	240	32x19 (D)	8%

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
SXVMCR10SPI	8	70	60
SXVMCR13SPI	13	80	70
SXVMCR17SPI	22	110	90
SXVMCR22SPI	34	150	130
SXVMCR32SPI	64	200	170



## SOUPLEX Totalgrip 70 ShA nubtop coated



Plain

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension
		Advised	Minimum		
SXVM10TPI	6	75	65	10x6 (Z)	8%
SXVM13TPI	12	90	80	13x8 (A)	8%
SXVM17TPI	22	140	120	17x11 (B)	8%
SXVM22TPI	36	180	140	22x14 (C)	8%
SXVM32TPI	71	260	230	32x19 (D)	8%

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
SXVMCR10TPI	4	60	50
SXVMCR13TPI	8	70	60
SXVMCR17TPI	15	100	80
SXVMCR22TPI	25	140	120
SXVMCR32TPI	50	190	160

Food	CE - FDA*	Coefficient of friction	HDPE: 0.35	Temperature extremes	-20°C / +60°C
Hardness	85 ShA		Steel: 0.6		
Pretension	5 - 8%		Stainless steel: 0.7		

\*Except Supergrip coatings (NA) and green SOUPLEX.



# TRAPEZOIDAL PROFILES



Blue SOUPLEX 80 ShA and SUPERFLEX 70 ShA profiles are mainly used as welded guides on our DEL/FLEX and SOUPLEX conveyor belts.

The elasticity, flexibility and adhesion of these profiles limit them to handling lightweight products without accumulation on short centre distances and preferably on HDPE slider beds.



## SOUPLEX blue



Plain

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension
		Advised	Minimum		
SXVB06-0001	2.5	30	25	6x4 (Y)	8%
SXVB08-0001	3.5	45	35	8x5 (M)	8%
SXVB10	5.5	65	50	10x6 (Z)	8%
SXVB13	10	75	65	13x8 (A)	8%
SXVB17	18	120	100	17x11 (B)	8%

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
-	-	-	-
-	-	-	-
SXVBCR10	3.7	45	35
SXVBCR13	7.5	55	45
SXVBCR17	12	80	65

Food	CE - FDA	Coefficient of friction	HDPE: 0.35	Temperature extremes	-20°C / +60°C
Hardness	80 ShA		Steel: 0.6	Packaging	30 m
Pretension	6 to 10%		Stainless steel: 0.7		



## SUPERFLEX translucent



Plain

Reference	Traction strength (daN)	pulley Ø (mm)		Section	Tension
		Advised	Minimum		
SFVT06	1.8	25	20	6x4 (Y)	10%
SFVT08	3	35	30	8x5 (M)	10%
SFVT10	4.5	55	45	10x6 (Z)	10%
SFVT13	8	70	60	13x8 (A)	10%
SFVT17	13	110	90	17x11 (B)	10%

Cogged

Reference	Traction strength (daN)	pulley Ø (mm)	
		Advised	Minimum
-	-	-	-
-	-	-	-
-	-	-	-
SFVTCR13	5	50	40
SFVTCR17	10	75	60

Food	CE - FDA	Coefficient of friction	HDPE: 0.5	Temperature extremes	-20°C / +40°C
Hardness	70 ShA		Steel: 0.7	Packaging	30 m
Pretension	8 - 12%		Stainless steel: 0.8		



# TRAPEZOIDAL PROFILE COATINGS

## COATINGS OF SOUPLEX 85 ShA AND TOTALGRIP 70 ShA PU



Quality	Color	Smooth	Nubtop	Sawtooth	SG3	Trellis
Standard SOUPLEX	Green	SLI	SPI	SUS	SSG	SLO
SOUPLEX Food	White / Blue					
TOTALGRIP Food	Translucent	TLI	TPI	TUS	TSG	TLO

## SUPERGRIP COATINGS



GREEN PVC 40 ShA



BLACK RUBBER 60 ShA

Reference

NA

NC

## OTHER COATINGS



POLYESTER FELT




ARAMID FELT

Reference

FP

FA



LINATEX 40 ShA



LYCRA 25 ShA

Reference

LI

LY

For any coated belt, complete the item code by referencing the coating reference letters.