
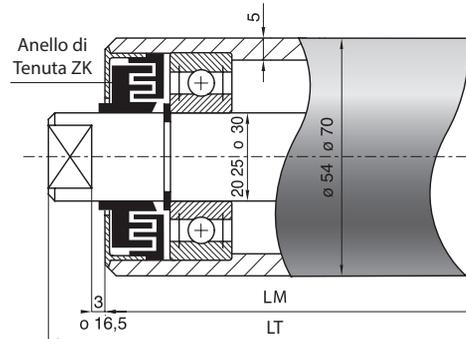
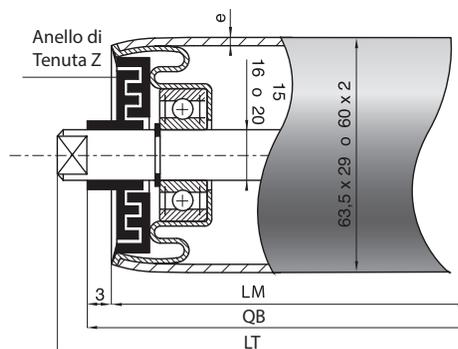



RULLI A GRAVITÀ SERIE PESANTE

Serie 100 000

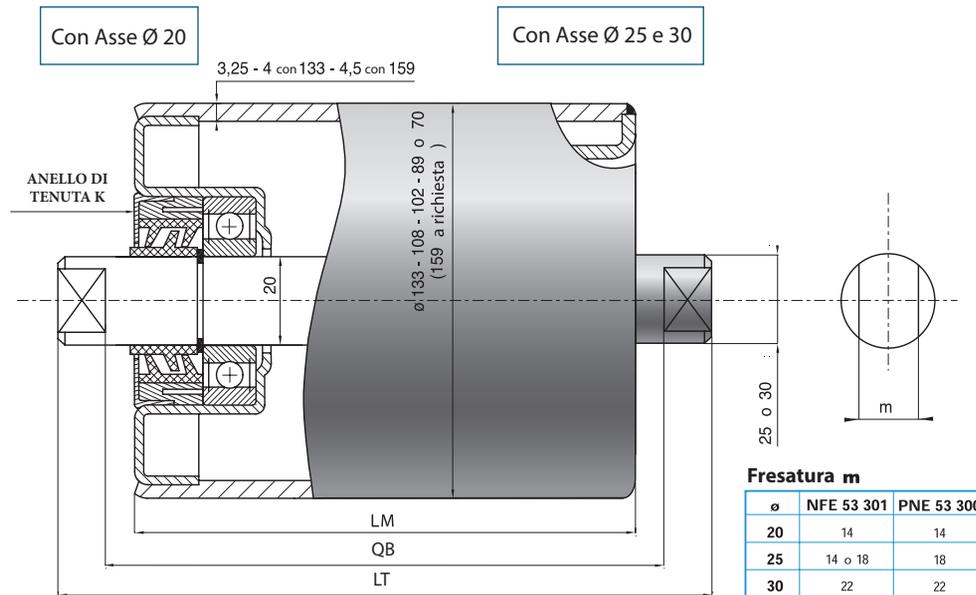


RULLI A GRAVITÀ SERIE PESANTE

Serie 80000

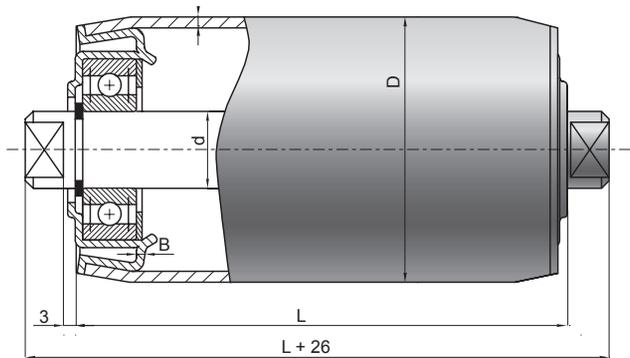


D	d	e	B
101,6	20 25	3,6	2
89	20 25	3,25 ou 5	2
70	20	2,9	2

Serie 80000

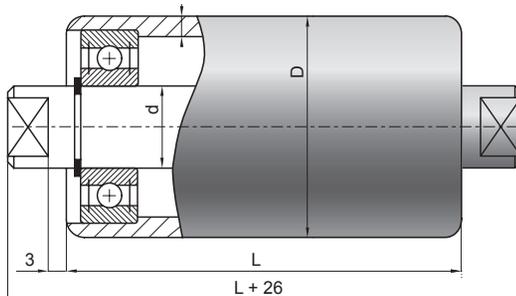


D	d	e
54	20 25	5
60	20 25	
70	25 30	

Serie 83000

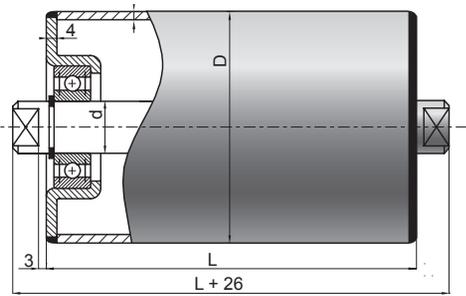

D	d	e
89	20 25 30	3,25 ou 5
101,6		3,6
108		3,6
133	25 30	4 ou 5
159		4,5


Serie 77000

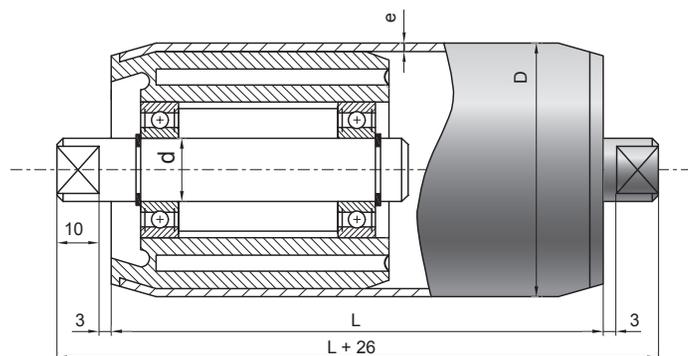

Diametri disponibili mm: 40x3, 50x2, 60x2,70x2,70x3
Altri modelli in preparazione.

RULLI D'IMPATTO, CON ANELLI E PULITORI


Serie 101 000

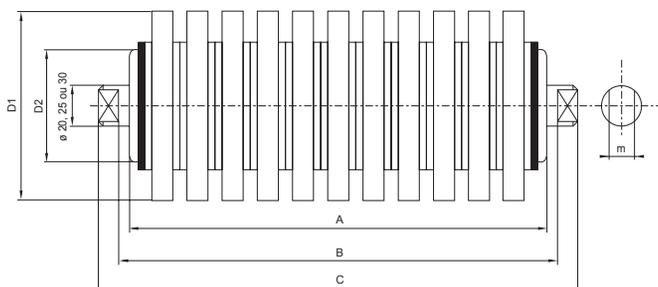

D1	D2
89	63,5
133	88,9
159	88,9

Nastro	350	400	500	600	650	700	800	900	1000	1200	1400	1600
A	125	150	190	230	240	250	290	325	360	430	500	570
B	131	156	196	236	246	260	296	331	366	436	506	576
C	151	176	216	256	266	280	316	351	386	456	526	596


Serie 102 000

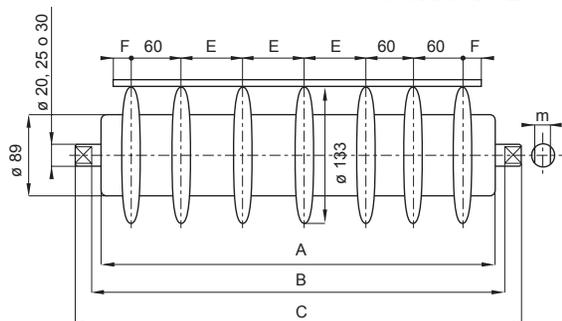


Nastro	A	B	C	F	N° anelli
400	475	508	540	30	5
500	575	608	640	30	6
600	675	708	740	30	7
650	725	758	790	30	7
700	775	808	840	40	7
800	875	908	940	40	8
900	1015	1048	1080	40	9
1000	1115	1148	1180	40	9
1200	1315	1348	1380	50	10
1400	1515	1548	1580	60	11
1600	1715	1778	1780	60	13

Serie 103 000

Nastro	A	B	C	N° giri
400	475	508	540	12
500	575	608	640	14
600	675	708	740	16
650	725	758	790	18
700	775	808	840	18
800	875	908	940	22
900	1015	1048	1080	24
1000	1115	1148	1180	28
1200	1315	1348	1380	32
1400	1515	1548	1580	38
1600	1715	1778	1780	42

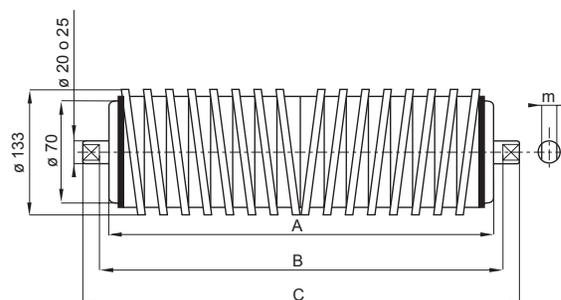


Serie 104 000

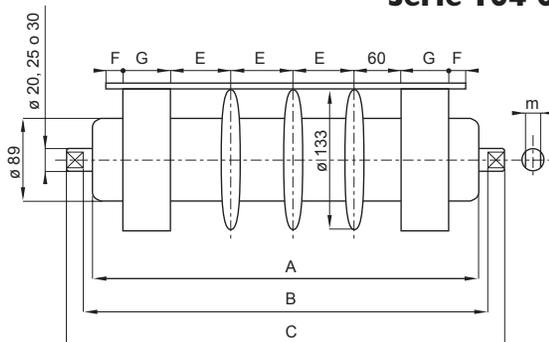

Nastro	A	B	C	F	G	N° anelli
400	475	508	540	30	50	1
500	575	608	640	30	50	2
600	675	708	740	30	50	3
650	725	758	790	30	50	3
700	775	808	840	40	50	3
800	875	908	940	40	100	3
900	1015	1048	1080	40	100	3
1000	1115	1148	1180	40	150	4
1200	1315	1348	1380	50	150	5
1400	1515	1548	1580	60	150	6
1600	1715	1778	1780	60	150	8

Le serie 102000 e 104000 possono essere fornite con distanziali PVC e rondelle di arresto saldate


Serie 201000

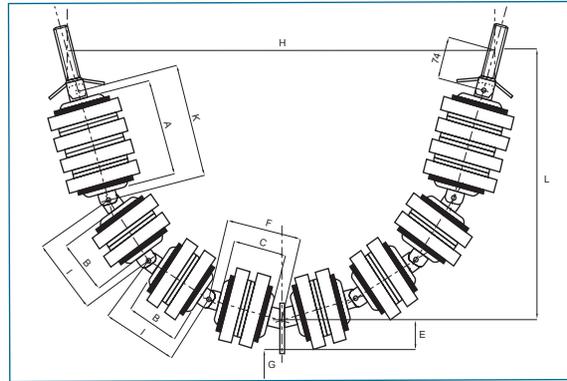

Larghezza	Portata m ³ /h			L	H	E	G	Ø Rullo mm	A	B	C	F	I	K	N° di bobine	Peso ghirlande kg	Ø Cavo X	Ø Assi mm		
	10°	15°	20°																	
500	103	110	118	530	302	80	30	63-89	66	66	66	105	92	92	8	11,2	8	20/25		
650	184	196	211	570	366	80	30	63-89	115	66	66	105	92	155	8	11,6	8	20/25		
800	289	308	331	730	420	80	30	63-89	115	66	66	105	92	155	10	14,4	8	20/25		
1000	466	495	532	920	510	80	40	89-133	200	100	130	185	130	234	8	38	10	30		
1000	466	495	532	920	510	80	40	89-159	192	95	130	172	137	234	8	41	10	30		
1200	684	727	782	1100	555	80	40	89-133	280	100	130	185	130	315	8	40	10	30		
1200	684	727	782	1100	555	80	40	89-159	195	130	140	182	172	237	8	43	10	30		
1400	944	1004	1079	1150	648	80	40	89-133	280	100	130	185	130	315	10	53	10	30		
	944	1004	1079	Consultaci					89-159	Consultaci										

*Per 1 m/s e pendenza 4-7%

Serie 210000

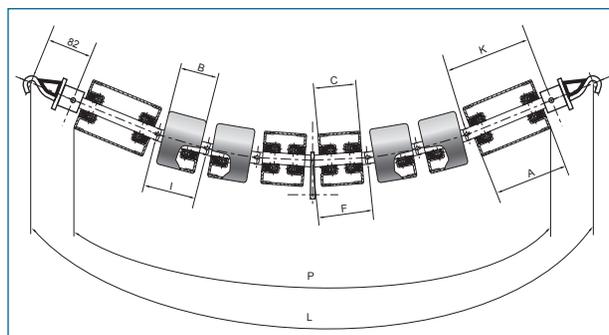

larghezza	L	P	Ø rullo mm	A	B	C	F	I	K	N° di bobine	Peso ghirlande kg	Ø Assi mm	
500	764	584	89	66	66	66	105	92	103	6	8,5	20	
650	926	740	89	66	66	66	105	92	92	10	12	20	
800	1072	860	89	125	66	66	105	92	165	8	10	20	
1000	1364	1140	89	100	100	130	185	130	155	8	17	25	
1200	1520	1298	89	190	100	130	185	130	230	8	24	25	
1400	1674	1440	89	130	100	130	185	130	180	10	31	25	
1600	consultaci			consultaci									

RULLI A GHIRLANDA

Serie 200000

